

NOTE: We recommend that this product is installed by the professional only. we accept no liability for damages caused by incorrect assembly ,installation or use. If there is any doubt, please contact the specialist from the seller for help.











IMPORTANT!

- For safety reasons, the ceiling or mounting surface must be capable of supporting the combined weight of the mount and the projector; otherwise the structure must be reinforced.
- At least two people are required for this installation. Do not attempt to install this mount alone under any circumstance.
- Make sure that no electrical cables,water pipes or gas pipes are located within the mounting surface.

Tools required for the installation:


- Phillips Head Screw Driver
- Electric or Portable Drill
- 1/8" (3 mm) Drill Bit + Stud Finder (Drywall Installation)
- 5/16" (8 mm) Masonry Bit (Concrete Installation)

Also make sure that all of the hardware has been included with your mount.You should find the following:

- (A) Lag Bolt x 4  (B) Concrete Anchor x 4  (C) M5 X 12 Screw x 4  (D) Lag Bolt Washer x 4 
- (E) M4 x 12 Screw x 4  (F) M4 Washer x 4  (G) M5 X 8 Screw x4  (H) Allwn Wrench X1 
- (I) M3 x 12 Screw x 4  (J) M5 Washer x 4 


Installing the Projector Mount

1

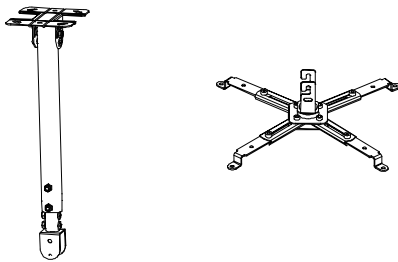

Prepare two main parts

4



Using screw (E) +Washer(F) or screw (I) assmeble the base claw

2




If concrete ceiling,pls USE screw (A) ,Wahser(D) and anchor (C) to fix the pole to the ceiling
If wood ceiling,pls use screw (A) and washer(D) to fix the pole to the ceiling


5

Final Adjustment

3



USE screw (G) and washer (J) to fix the claw to the pole with allen key (H)



WARNING:Do not over loosen or tighten the Screws
The bottom can be rotated three hundred and sixty degrees.