


MUSTANG™ ELECTRIC 16:9 SCREEN SC-E135D169

The SC-E135D169 has a smooth-running electric motor which allows the screen to easily scroll up and down with its in-line switch. The scratch resistant steel white case will protect the screen when its not in use, and blends into any decor. With the screen down, enjoy its matte white viewing surface which diffuses projected light uniformly over the screen, creating ideal viewing from any angle. Black masking borders around the sides of the screen increase picture focus and contrast. The HDTV (widescreen) versions include a black masking border above the image for a crisp, clean look. *When looking for clean-line design that also delivers top-of-the-line performance, choose the ultimate performer – Mustang's Electric Projection Screen.*

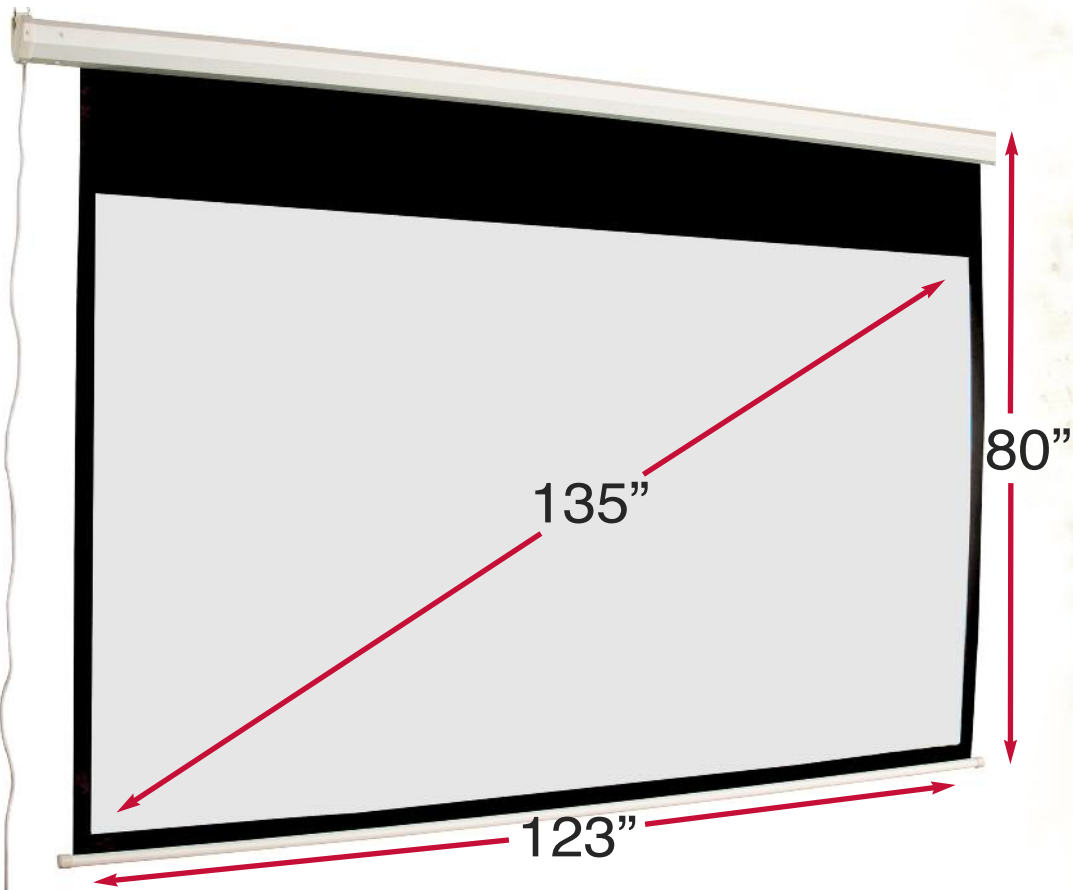

SPECIFICATIONS

- Nominal Diagonal Size: 135"
- Aspect Ratio: 16:9 Home Theater
- Screen Size: 123" w x 80" h
- Viewing Size: 120" w x 68" h
- Screen Material: Matte White
- Top Mask: 12"
- Case Color: White
- Format: Motorized Wall Mount
- Gain: 1.0
- Electric Cord Length: 98"

FEATURES

- Matte White Screen Surface for Optimal Image and Color Reproduction
- Installs to Wall or Ceiling
- Installation Hardware Included
- Washable Screen Surface (mild soap and water)

WARRANTY

- Three Years Parts and Labor

www.mustangav.com

MUSTANG™

Mustang Screen Limit Switch Adjustment



This is the power end of the case. The power cable connection looks different than yours but the location and function of the limit switches will remain the same. A rubber plug is located just above the word "Pass" on the casing.



This photo shows the plug removed. It will give you access to the yellow hex head bolt. Again, the color of the bolt is possibly different on your screen but the placement and function are identical.

Here is another picture of the two hex head bolts.

This shot is from underneath where the screen travels out of the casing. These are nylon so do not put too much tension on them. Also, it is best to start with very small adjustments like 1/8 turn or less to begin.

You do not want to allow too much over-travel in either direction as it could damage the screen.

